

GPS-BASED OBJECT TRACKING SYSTEM USING FIREBASE APPLICATION FOR HAULAGE TRANSPORT

Aufa Rifqi¹, Ida Wahidah², Ridha Muldina Negara³

¹Telecommunication Engineering , Faculty of Electrical Engineering , Telkom
University

aufarifqi@telkomuniversity.ac.id, wahidah@telkomuniversity.ac.id,

ridhanegar@telkomuniveristy.co.id

Abstract

There are many objects in various field such as transportation, industry and smartphone that can be tracked. The purpose of this thesis is to analyze the performance of Global Positioning System (GPS) tracking system using Firebase application for haulage transport object. The current location of the object is monitored by the administrator on website. The content on the website is a database and visualization of coordinates for maps. This final task is designed as a tool that connects between a microcontroller and a GPS module as well as map visualizations of the coordinate points received by the GPS module. This tool has a tracking system function in which the database is continuously updated until power is depleted. In general, components used to allow the tracking process to occur are the Global Positioning System (GPS) receiver, Raspberry Pi as microcontroller, and computer as the control unit. This tool is applied to the truck to protect the appliance from rain and also provide tracking function. By using a Global System for Mobile Communications (GSM)-based modem, the tool can work with a relatively long range of distances. As for the tracking function found from the Neo-6M module which is a tool equipped with an antenna so that it can receive the Coordinate point of the satellite, the Coordinate point received by the Raspberry Pi directly in the database where the database is configured in Firebase realtime-database (FRD).

Keywords: Raspberry Pi, GPS, GSM, FRD.

1. Introduction

GPS is a satellite navigation system used to determine the ground position of an object or "object tracking". GPS consists of a network of 24 satellites, each satellite radiate radio signals that a receiver device installed track, trip distance, distance to destination, sunrise and sunset time. Because of era development, GPS is available in a smartphone, transportation, computer, notebook and also modified in a small chip. For the location of the device, it is self can be able tracked by Internet Protocol (IP) address, Media Access Control (MAC) address, Global system for mobile communications (GSM), and phone number.

Nowadays, there is many people do not know about performance of GPS, showing map without know the coordinate it makes location not exposed in Realtime, not 100% accurate of longitude and latitude on the map. By utilizing technology from GPS which has been integrated with micro controller, this thesis intends to analyze the performance of GPS by decrease the delay, modifying the cloud server and exposed the location in Real-time mode.

1.2 Problem Formulation


The problem in this thesis is the transportation of haulage that can still be lost, stolen, accident, and out of the tracking lane. This thesis needs to design application which the data can be shown as

a real-time condition. This thesis offers a solution to make private application that can be monitored by the user. In the usual tracker application, the user is only able to track its own devices, without supervision, the user cannot report himself to the security in case of an accident and stolen. This thesis is a solution to make tracking applications and is monitored in real-time condition.

2. Basic Concept

2.1 Mechanism Of Object Tracking

Object tracking is one of the most frequently used methods in several companies dealing with the transportation of package, and package delivery. The purpose of object tracking is to track the location of the object, track object loss, and monitoring. A device that receives a location is called a GPS (Global Positioning System), GPS can be implemented on any device that has minimal specifications such as a microcontroller. In Figure 2.1 explained the object tracking mechanism in general, when the device sends a request to search for a location, GPS receives the location of the satellites in outer space and sends the recorded location to the requesting device.

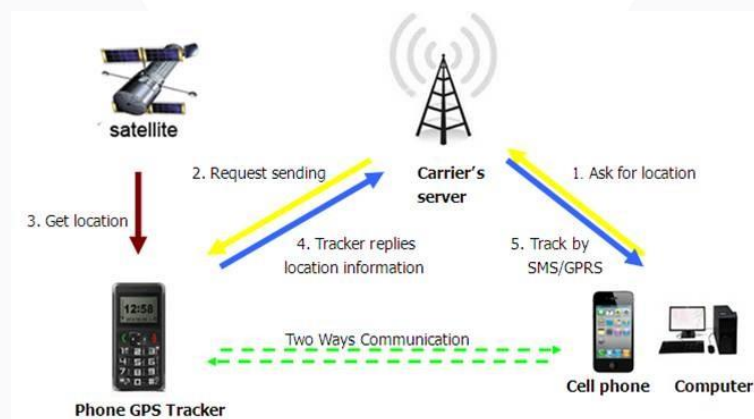

(Source: Alarm Sistemleri Antalya, "Mobile Tracking Live")

Figure 2.1 Raspberry Pi 3 model B

2.2 Global Positioning System

Global Positioning System (GPS) is a system to determine the location on the earth surface with the help of synchronization of satellite signals. This signal is received by a receiver on the surface and is used to determine its location, direction, and time. In Figure 2.2, GPS module used is a GPS NEO-6M. This module is used to acquire the location and can also provide timely information, continuously without relying on certain time and weather.



Figure 2.2 Neo-6M

The location Output on the GPS itself is expressed at a point of coordinates longitude and latitude where the coordinate point can be used to display the location where the GPS presence.

2.3 Raspberry Pi

Raspberry Pi in Figure 2.3 is an SBC (Single Board Computer). Raspberry Pi can do almost anything that can be done by computers with Linux operating systems such as making servers, making programs with various languages, one of which is a high-level language like Python. Raspberry Pi can run a GUI-based operating system, so it can use it to perform standard activities such as browsing, listening to music, watching movies and playing games.

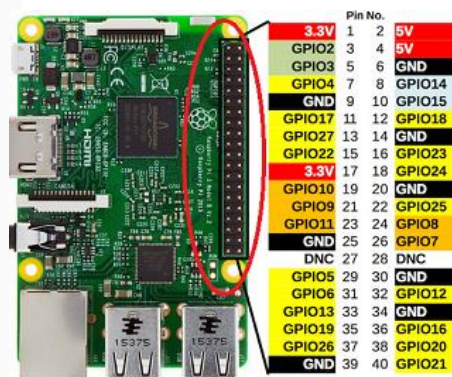


Figure 2.3 Raspberry Pi

2.4 Modem 4G LTE

This modem uses a system from GSM which requires a connection card that is supported by the provider to access the Internet. 4G LTE is the Fourth Generation Long Term Evolution. This is a combination of two different terms and has its standard. G stands for generations alias generation. Huawei E3772 is the modem hat used.

This modem is a communication system for connecting raspberry pi and the GPS module. The modem that used is in Figure 2.4.



Figure 2.4 Huawei E3372

3. Work System

From Figure 2.5 shows the flow chart of the tracking system design that uses the Raspberry Pi as a processor to process data from the modules used. Turn on the Raspberry Pi need time around 20-30 second until the GPS Module antenna receive location. Neo-6M is GPS modules are used to send information in the form of coordinates based on their actual location. The system starts by configuring the Raspberry Pi with GPS module and Modem to connect to the IoT platform. The GPS module reads the data in the form of transportation coordinates at that time. If the system successfully receive the coordinate, the coordinate sent directly to the IoT platform continuously. Power off the Raspberry Pi to stop the tracking process.

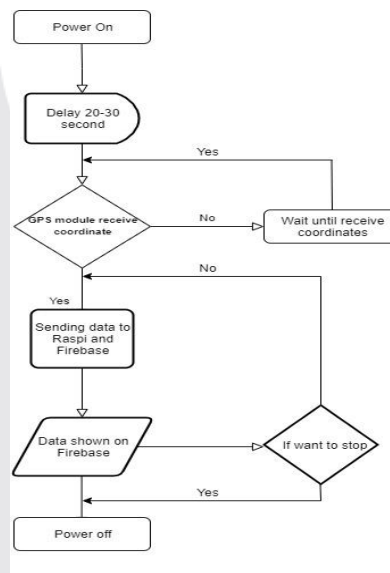
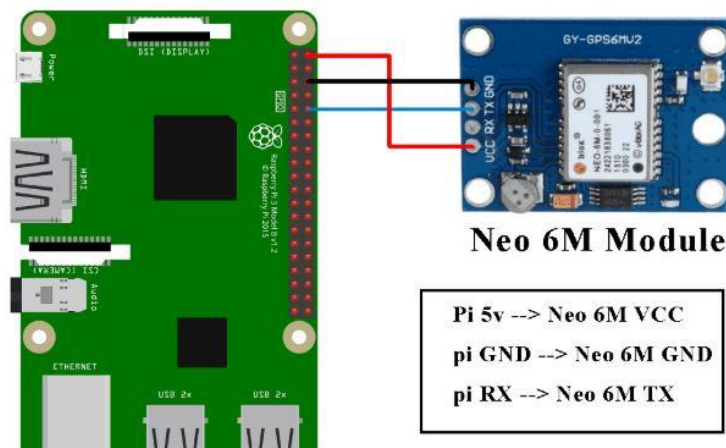


Figure 2.5 Tracking Flowchart

3.1 Neo-6M Configuration

Neo-6M is serial communication, the connection must undergo a sprinting. Tx from Neo-6M plugged into Raspberry pi Rx. in Figure 3.4 is the detail explanation. Raspbian used the UART (Universal Asynchronous Receiver-Transmitter) as a serial console and it is need to turn off that functionality. Replace the contents inside:

1. /boot/cmdline.txt\$' file into '\$dwc_otg.lpm_enable=0 console=tty1 root=/dev/mmcblk0p2 rootfstype=ext4 elevator=deadline fsck.repair=yes rootwait quiet splash plymouth.ignore-serial-console

**Figure 3.1** Dataset Training Results

Before write the python code to get the GPS data it needs to set up a few things. Default Raspberry Pi uses the serial port for this “console” login. To use the serial port to get data from the GPS module it needs to disable the console login. There are two serial ports in Raspberry pi 3: serial 0 and serial 1. between those serial port will point to GPIO pins 14 and 15, it has to use serial 0.

3.2 Modem Configuration On Raspberry Pi 3

Modem is a media communication system that is used to connect the GPS mod-ule on the Internet so that it can transmit coordinate data to the Cloud Server. Con-figuring a modem on

a Raspberry Pi 3 relies on the ISP and what modem is used, each ISP has a configuration difference. The first step required is to check what type of modem to use and look for references to the USB port of Raspberry Pi 3 available for the modem used and activate the modem inside the port of Raspberry Pi 3. Create a custom config file for "usb_modeswitch" on the Raspberry Pi. Extract some more information for "usb_modeswitch" config file so that it can be available to do the switching manually. Replace the extracted codes on the terminal window into:


1. `tar -xvzf /usr/share/usb_modeswitch/configPack.tar.gz 19d2/:2000`
2. Open "/etc/usb_modeswitch.conf" file add the information that obtained and type "sudo leafpad /etc/wvdial.conf" to write the wvdial config file preview in figure 3.6 and connect to the internet with command wvdial "3gconnect"

```
Init1 = ATZ
Init2 = ATQ0 V1 E1 S0=0 &C1 &D2 +FCLASS=0
Init3 = AT+CGDCONT=1,"IP","internet"
Stupid Mode = 1
Modem Type = Analog Modem
ISDN = 0
Phone = *0853...|#
Modem = /dev/gsmmodem
Username = { }
Password = { }
Baud = 460800
```

Figure 3.2 Wvdial Configuration.

3.3 Merging All Configuration

All configurations need to be merged in case of completing the project to run, on the 3.4 image link URL of Firebase listed, it is a project that is initialized directly from the website. Using a Python library makes the configuration implemented automatically. So to send any real-time data from a GPS Neo-6M to Firebase is simply called so all processes are done simultaneously. The serial library is a library of GPS modules with serial communication type, string library is a library for variables that are called or given information, pynmea2 library is a library whose function is to parse data (to divide), JSON library is a library of data exchange between Raspberry Pi and Firebase, and the OS library is a library for calling functions called 'os'.

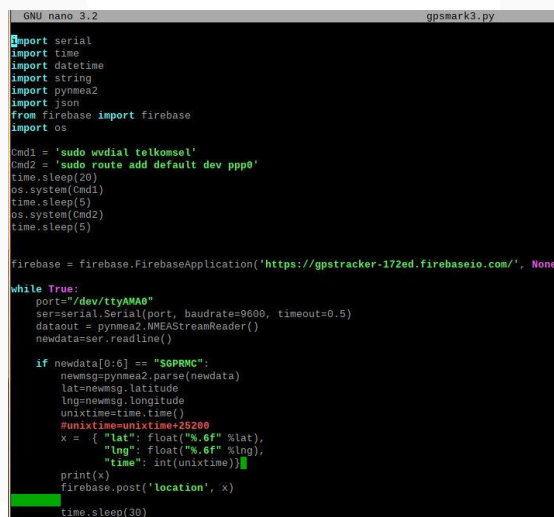

```
GNU nano 3.2 gpsmark3.py
import serial
import time
import datetime
import string
import pynmea2
import json
from firebase import firebase
import os

Cmd1 = 'sudo wvdial telkomsel'
Cmd2 = 'sudo route add default dev ppp0'
time.sleep(20)
os.system(Cmd1)
time.sleep(5)
os.system(Cmd2)
time.sleep(5)

firebase = firebase.FirebaseApplication('https://gpstracker-172ed.firebaseio.com/', None)


while True:
    port="/dev/ttyAMA0"
    ser=serial.Serial(port, baudrate=9600, timeout=0.5)
    dataout = pynmea2.NMEAStreamReader()
    newdata=ser.readline()

    if newdata[0:6] == "$GPRMC":
        newmsg=pynmea2.parse(newdata)
        lat=newmsg.latitude
        lng=newmsg.longitude
        unixtime=time.time()
        #unixtime=unixtime+25200
        x = { "lat": float("%.6f" %lat),
              "lng": float("%.6f" %lng),
              "time": int(unixtime)}
        print(x)
        firebase.post('location', x)
        time.sleep(30)
```

Figure 3.3 Merging Configuration.

3.4 Accuracy Result

The shift that occurs when the GPS module sends the data Coordinate it is smaller due to the data transmission that continues to occur after a 1-second operation of the program. It can be seen in Figure 3.3 shifts that occur is below 100 meter although the speed of the vehicle touches 80 km/h. It can be expressed for high speed and with the interval of data transmission in 1-second, the accuracy that can be by Neo-6M including high.

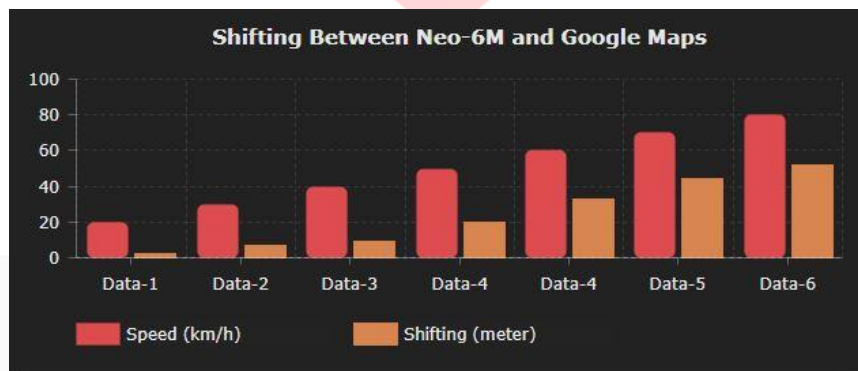**Figure 3.3** Accuracy Graphic.

4. Conclusion

From the test results of the data transmission system from GPS module which is integrated with Raspberry Pi to the IoT platform that has been done at this under-graduate thesis, obtained a few conclusions as follows:

1. To obtain the location of a device is done by utilizing the Neo-6m GPS module that serves to obtain a coordinate point that is integrated with the Raspberry Pi as a data processor.
2. API obtained from Firebase is directly encoded on the back-end website so that sending and retrieving data between the GPS module and Raspberry Pi can be connected to the IoT platform so that maps visualization can be done.
3. To obtain accuracy data, the modem is required to be connected to a Raspberry Pi USB port-1 whose program has been configured, so that the GPS module can send and receive coordinates obtained from the antenna (the coordinate number is not 0).
4. The configuration is made as well as back-end and front-end on the website visualization so that the data in the database is continuously updated automatically on the website so that it can be visualized on the website frontend.

BLIBIOGRAPHY ;

- [1] R. Bajaj, S.L. Ranaweera, and D.P. Agrawal., "GPS: location-tracking technology," IEEE Computer Society, vol. 35, no. 4, pp. 92–94, Apr 2002.
- [2] David S. Linthicum, "The Evolution of Cloud Service Governance," IEEE Cloud Computing., vol. 2, no. 6, pp. 86-89, Nov-Dec 2015..
- [3] K. Dhinakaran, S. Srinath, S. Sriram, and R. Venkateshwar, "GPS based tracking system for transit objects", in 2017 Third International Conference on Science Technology Engineering and Management ICONSTEM., (Chennai, India), August 2017.
- [4] Reza Zekavat, R. Michael Buehrer, Overview of Global Positioning Systems, 2nd ed., 2019.
- [5] Hamman Aryo Bimmo, AndrianRakhmatsyah S.T.,M.T., Aji Gautama Putrada S.T.,M.T., "Microcontroller Based Distance Measuring Comparison on Motorcycle using Google Maps and GPS Module", Telkom University, 2017.
- [6] Wu-Jeng Li, Chiaming Yen, You-Sheng Lin, Shu-Chu Tung, and Shih-Miao Huang, "JustIoT Internet of Things based on the Firebase Real-time Database", in 2018 IEEE International Conference on Smart Manufacturing, Industrial and Logistics Engineering (SMILE), Hsinchu, Taiwan, 8-9 Feb 2018.
- [7] Liberios Vokorokos, Matus Uchnar, Emilia Pietrikova, "The Raspberry Pi in an Education Process", in 2018 IEEE 12th International Symposium on Applied Computational Intelligence and Informatics (SACI), Timisoara, Romania, 17-19 May 2018.